

pyrite

loommo







loommo






PYRITE

The fiery stone from the core of the Earth.

This BOMMA collection was inspired by pyrite, the golden fire-stone in the shape of a perfect cube, while the silver version of the shade reflects its inspiration in salt crystals. By blowing a molten organic substance into a precise cold form, the skilled hands of our glassmakers create a unique light fixture of elemental, yet perfect shape. The gleaming surface of this hand-blown crystal cube is enclosed from three sides by a polished metal component in either silver or gold tones.

Design by Dechem Studio

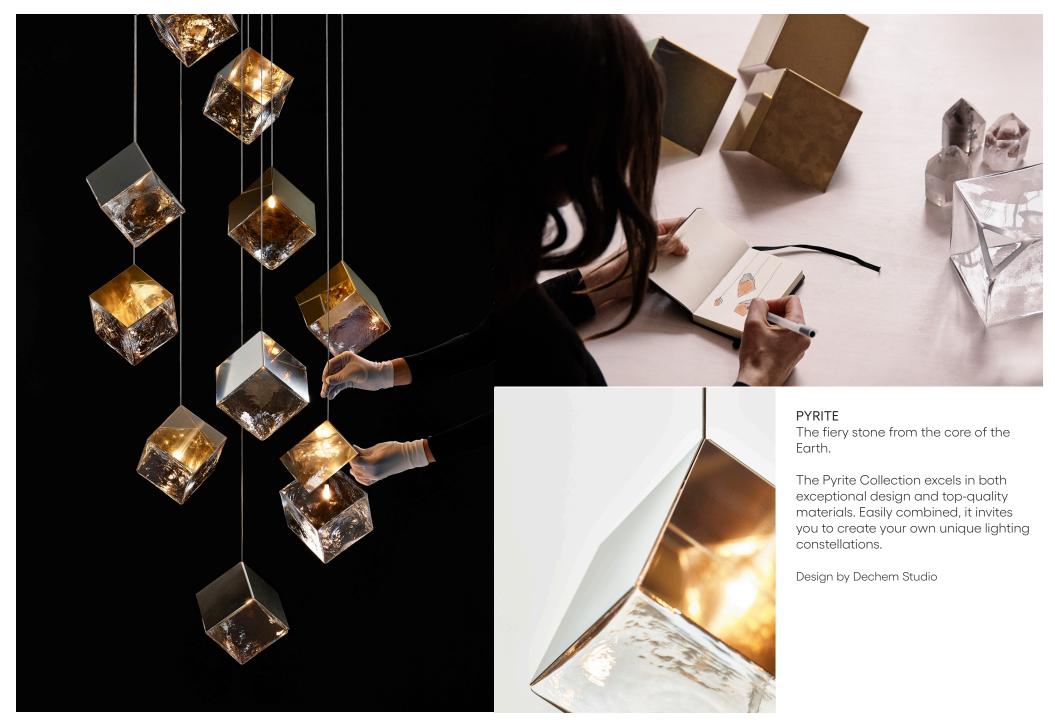





loommo





Installation of 98 pcs Salt

Installation of 27 pcs Pyrite



Installation of 36 pcs Pyrite

Installation of 21 pcs Pyrite and Salt








salt clear glass silver fitting pyriteclear glassgold fitting


pendant


Glass options: clear Fitting options: silver, gold














26 pendants

26 pendants rectangular

chandeliers


Pyrite collection is suitable for bomma constellation. Project your unique vision into space and create your own bomma constellation.

technical informations

Pyrite

Design by Studio Dechem

All Bomma products are hand-made from mouth-blown lead-free crystal. Therefore any small bubbles, non-melts and irregularities in the glass are both proof and a characteristic feature of this traditional craft.



LIGHTING DESCRIPTION	
Size	183 × 209 × 225 mm
	7,2 × 8,2 × 8,9 inch
Cable	transparent 2,5 m / 98,4 inch
Weigh	1,9 kg / 4,2 lbs
Material	mouth-blown lead-free crystal in clear
Mounting	polished stainless steel / polished stainless steel with nitride titan coating
Mounting Materials	polished stainless steel / polished stainless steel with nitride titan coating
Mounting Colors	silver / gold
Metal sheet top	polished stainless steel, gold
Protection	IP 20
Nominal voltage	220-230V / A.C. 50 hz (EU)
	100-120 V / A.C. 60 Hz (USA)
Class	II. EU / I. USA
LIGHT SOURCE	
Туре	G4, 1,2W LED, 120 lm
Base	G4 (EU) / G4 (USA)
Voltage	12V, AC
Temperature	2700 K
Color index	RA 90+
Dimming	Dimmable with 0/1-10VDC, on demand dimmable with TRIAC.
TRANSFORMER	
Primary	100-240V, 50/60 Hz, 0,04A
Secondary	DC 700mA (0,5V-4V) 1×3W
PACKAGING	
Material	Cardboard
Size	230 × 220 × 220 mm
	9 × 8,6 × 8,6 inch
Origin: traditionally produc Intellectual property license represented by Bohemia M	e holder: Bomma Czech Republic (EU)



BMRC Group s.r.o. Hvězdova 1716/2b, Prague 4, 140 00, Czech Republic

info@bomma.cz

step beyond